



2015

FISHING LINE CATALOG

SUNLINE

The Strength To Guarantee Your Confidence
SUNLINE

TECHNOLOGY

Sunline's technology for more aggressive fishing action

- Sunline led the industry in displaying line strength on the label. We believe this is the least a manufacturer can do to be accountable to the consumer in terms of quality assurance. Also, in practical terms, line strength is also the single most important piece of information for product selection.
- Sunline strives to broaden the possibilities of fishing by offering a wide selection of fishing line to support all kinds of fishing techniques for all species of fish.
- Sunline pursues the highest quality in line manufacture, from R&D on chemical and resin processing technologies to quality management techniques.

Nylon Line Polyamide monofilament

Soft, supple, and easy to handle, nylon is an all-around material that suits any situation, outperforming fluorocarbon in both straight and knot strength. The flexibility of the material makes it spool easily and snugly onto the reel, and the line stretches just enough to absorb any sudden shocks. Because nylon is more absorbent than other materials, the line should be replaced occasionally to enjoy maximum performance. It is the line of choice for all anglers, from beginner to championship level.

- Sinking speed (specific gravity): 1.14 (some variation depending on the type of nylon)
- Moisture absorption: Yes (diameter and stretch increase with water absorption) ● Flexibility: Soft
- Stretch (amount of stretch at breaking point): Yes (moderate stretch absorbs shock. High initial stretch.)
- Abrasion resistance: Soft surface is vulnerable to scratches and damage. ● Straight strength: Strong
- Knot strength: Approx. 85% of straight strength ● Refractive index: 1.53

Fluorocarbon Line Polyvinylidene fluoride monofilament

While slightly lower in strength compared to nylon, the exceptional abrasion resistance of fluorocarbon makes it all but impervious to damage from wear, making for an incredibly durable line. The low initial stretch allows for good sensitivity, while like nylon, there is just enough stretch to absorb shock. The hardness of the material may take some getting used to.

- Sinking speed (specific gravity): 1.78 (fast sinking speed.) ● Moisture absorption: No ● Flexibility: Hard
- Stretch (amount of stretch at breaking point): Yes (slightly less stretch than nylon. Low initial stretch means better sensitivity.)
- Abrasion resistance: Hard surface is resistant to scratches and damage. ● Straight strength: Strong
- Knot strength: Approx. 70% of straight strength
- Refractive index: 1.42 (nearly invisible in water due to the refractive index being close to that of water (1.33)).

Manufacturing and processing technologies

HMW High Molecular Weight Nylon

Newly developed nylon with even higher molecular weight than our conventional ultra-strength nylon. High levels of straight and knot strength. High performance nylon line that's exceptionally durable, very manageable, with low memory.

UV-R UV-Resistant process

Maximum protection against UV damage for vulnerable nylon lines.

P-Ion Plasma Ion Technology

Jointly developed by Sunline and Plasma Concept Tokyo (a Tokyo Institute of Technology venture). Technology to modify the line surface at will to produce the perfect fishing line for any target or situation.

VIV Vivid Dyeing process

Sunline's unique dyeing technology – vividness, visibility, and softness in one.

TRP Triple Resin Processing

Retains its strength and suppleness even when knotted "Triple Resin Processing" is a unique process that fills in the spaces between the molecules with resin. As a result, the line is moisture proof, very slick, and resistant to shock and wear.

DRP Double Resin Processing

Enhanced performance with double layer processing. In "Double Resin Processing," a double coat of various high-performance resins results in a highly competent line.

SRP Single Resin Processing

Advanced performance and reliability. A single coat of multi-purpose resin to enhance the quality of the original line.

Specifications

平行巻 Parallel Spooling

A spooling system which minimizes curling and surface indentation. Feel the difference as the line comes off the spool nice and straight and very smooth.

NSS Non-stress Spooling

Tension-free spooling maximizes the qualities of the line. Because no stress is placed on the line as it is spooled, the line comes off ready to deliver superior stretch performance.

IPS "インスタ" Spool Insta-stop Spool

Thin, compact spool for functionality and ease of storage. Spools out smoothly and lets you stop the line surely, quickly, and easily with the "Insta-stop" mechanism. Comes with a handy connected spool stopper.

Braided Line Polyethylene multifilament

SUPER PE Super PE

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No ● Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction.
- Straight strength: Approx. 2.5 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HG-PE High Grade PE

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No ● Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction
- Straight strength: Approx. 3.5 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HQ-PE High Quality PE

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No ● Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction.
- Straight strength: Approx. 2.7 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

ULT-PE Ultimate PE

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No ● Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction.
- Straight strength: Approx. 3.5 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HG-PE TYPE II High Grade PE + Polyester Line

- Sinking speed (specific gravity): 1.05
- Moisture absorption: No ● Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction
- Straight strength: Approx. 3.2 times stronger than nylon
- Knot strength: Approx. 40% of straight strength

HP-PE High Performance PE

- Sinking speed (specific gravity): 0.97 (floats.)
- Moisture absorption: No ● Flexibility: Supple
- Stretch (amount of stretch at breaking point): Minimal
- Abrasion resistance: Ultrathin filaments are easily damaged by friction.
- Straight strength: Approx. 2.7 times stronger than nylon
- Knot strength: Approx. 40% of straight strength



Plasma Ion Technology

Changing the Concept of Fishing Line.

For details, please visit our special site on our website : <http://sunline.co.jp/english/>



Jointly developed with Plasma Concept Tokyo Inc.,
a Tokyo Institute of Technology venture
4-14-13 Shinkoiwa, Katsushika-ku, Tokyo 124-0024 <http://www.pc-tokyo.co.jp/>

ISO Special **2015 New!!**

GOLDISH



211

Plasma Ion Technology and the strongest high molecular weight nylon

- High molecular weight (HMW) nylon for high level straight and knot strength. Designed with line stiffness to support the execution of fine movements that tournament pros demand.
- First in the industry to harness plasma ion technology for a line surface that's durable and highly water repellent. The line retains its manageability for hours as you fish.
- The combination of plasma ion technology and HMW nylon keeps the line drifting perfectly, making it easy to achieve the difficult task of synchronizing krill bait with a light rig. With this line, you can cast straight to your desired depth, naturally.
- The alternating pattern of gold (approx. 170cm) and pink (approx. 30 cm) lets you see the line trajectory and gives you visible feedback of small bites by wary blackfish.

Length : 150m ●Color : Gold & Pink

Standard Dia. (mm)	0.195	0.205	0.219	0.235	0.260	0.285	0.330	0.370	0.405
Strength (lb)	5.5	6	7	8	10	12	16	20	25
Line Size (#)	1.35	1.5	1.75	2	2.5	3	4	5	6



ISO Special **2015 New!!**

FINE FLOAT II



210

- The new technology "P-Ion" incorporated into our highly popular, long-selling signature floating line, Fine Float.
- Improved surface texture and highly durable water repellency with P-Ion processing. Gives you hours of fishing enjoyment due to the sustained basic performance of "not too floaty, not too sinky" that's required of a floating line.
- Unprecedentedly slick line surface made possible by our newly developed super-high water repellency technology. Guide and float friction are reduced, and even lightweight rigs can be sent straight to the desired point.

Length : 150m ●Color : Vivid yellow

Line quality	Hard		Semi Hard	Semi Soft		Soft		
Standard Dia. (mm)	0.205	0.219	0.235	0.260	0.285	0.330	0.370	0.405
Strength (lb)	6	7	8	10	12	16	20	25
Line size (#)	1.5	1.75	2	2.5	3	4	5	6

Length : 200m ●Color : Vivid yellow

Line quality	Medium Soft	Soft		
Standard Dia. (mm)	0.285	0.330	0.370	0.405
Strength (lb)	12	16	20	25
Line size (#)	3	4	5	6



Matsuda Special Tournament **2015 New!!**

BLACK STREAM MARK X



248


- Improved surface texture and highly durable water repellency with P-Ion processing. Hours later, the line stays just as manageable as it was when you started fishing.
- Better slickness due to the super-high water repellency resin, developed for the next evolution of Mark X. A quantum leap in line manageability to let you hook the wary, long-tailed, monster blackfish.
- The ultimate line marking system for better manageability.
- Markings on our reliable Blackie color, with its proven track record of numerous 60 cm-plus monster blackfish, lets you track the line visually and see every bite as it happens.
- Special UV blocking film to prevent UV damage.
- Special sticker for at-a-glance identification of line size.
- Size lineup to let you battle monster snapper, blackfish, and yellowtail.

Length : 600m ●Color : Blackie color with Fine Pink markings

Standard Dia. (mm)	0.195	0.205	0.219	0.235	0.248	0.260	0.275	0.285
Strength (lb)	5	6	7	8	9	10	11	12
Line Size (#)	1.35	1.5	1.75	2	2.25	2.5	2.75	3

Length : 200m ●Color : Blackie color with Fine Pink markings

Standard Dia. (mm)	0.310	0.330	0.370	0.405	0.470	0.520	0.570	0.620
Strength (lb)	14	16	20	25	35	40	50	60
Line Size (#)	3.5	4	5	6	8	10	12	14



NYLON LINE

SIGLON V



I.G.F.A. rated line for tournament fishing!

5046



Clear

Mist Green

- The spaces between the nylon molecules are filled with resin in a new resin reinforcement process to produce a hydrophobic line which retains its strength and limpness: a tremendous advantage in tournament fishing.
- UV resistant processing makes the line impervious to weakening or degradation due to sunlight.
- I.G.F.A. rated for incomparable strength to withstand aggressive pulling and shock.

Length : 30m connected spool ●Color : Mist Green

Standard Dia. (mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260
Strength (kg)	1	1.5	2	3	3.5	4	5	6

Length : 100m connected spool ●Color : Clear / Mist Green

Standard Dia. (mm)	0.063	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260
Strength (kg)	0.5	1	1.5	2	3	3.5	4	5	6
Standard Dia. (mm)	0.285	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength (kg)	7	7.5	8	10	12	15	17	19	24

Length : 100m single spool ●Color : Clear / Mist Green

Standard Dia. (mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260	0.285
Strength (kg)	1	1.5	2	3	3.5	4	5	6	7
Standard Dia. (mm)	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570	
Strength (kg)	7.5	8	10	12	15	17	19	24	

Length : 150m single spool ●Color : Mist Green

Standard Dia. (mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.370	0.405
Strength (kg)	3	3.5	4	5	6	7	7.5	10	12

Length : 300m single spool ●Color : Clear / Mist Green

Standard Dia. (mm)	0.104	0.128	0.148	0.165	0.185	0.205	0.235	0.260	0.285
Strength (kg)	1	1.5	2	3	3.5	4	5	6	7
Standard Dia. (mm)	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570	
Strength (kg)	7.5	8	10	12	15	17	19	24	

Length : 600m single spool ●Color : Clear / Mist Green

Standard Dia. (mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370
Strength (kg)	3	3.5	4	5	6	7	7.5	8	10
Standard Dia. (mm)	0.405	0.435	0.470	0.520	0.570	0.620	0.660	0.700	0.740
Strength (kg)	12	15	17	19	24	28	32	37	40

Length : 2000m single spool ●Color : Clear / Mist Green

Standard Dia. (mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370
Strength (kg)	3	3.5	4	5	6	7	7.5	8	10
Standard Dia. (mm)	0.405	0.435	0.470	0.520	0.570				
Strength (kg)	12	15	17	19	24				

Length : 5000m single spool ●Color : Clear / Mist Green

Standard Dia. (mm)	0.165	0.185	0.205	0.235	0.260	0.285	0.310	0.330	0.370
Strength (kg)	3	3.5	4	5	6	7	7.5	8	10
Standard Dia. (mm)	0.405	0.435	0.470	0.520	0.570				
Strength (kg)	12	15	17	19	24				


SUPER NATURAL



5196

A world-class Super Basic Monofilament Line designed to give the high performance required in a wide range of situations.

- Sunline's original UV-R processing for maximum protection against nylon's nemesis, UV rays. Minimizes reduction in line strength.
- Supple and easy to handle, Super Natural spools well onto the reel and is easy to keep organized. More convenient casting and retrieving means bigger catches!
- High strength, balanced performance nylon line with emphasis on a balance of straight and knot strength.
- Moderate stretch minimizes excessive shocks, with the tenacity to endure past the limit.
- Stable line diameter and truly round cross section for a low memory line that is resistant to kinks and curls.
- Comes in three colors: "Natural Clear" for exceptional transparency, "Jungle Green" for excellent camouflage, and "Mizu Blue" for perfect blending into water.

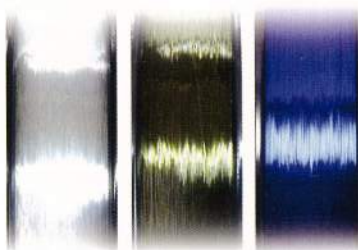

Natural Clear Jungle Green Mizu Blue

Length : 110yds / 330yds / 660yds

Standard Dia. (mm)	0.165	0.205	0.235	0.260	0.285
Strength (lb)	4	6	8	10	12
Line Size (#)	1	1.5	2	2.5	3
Standard Dia. (mm)	0.310	0.330	0.370	0.405	0.435
Strength (lb)	14	16	20	25	30
Line Size (#)	3.5	4	5	6	7

Length : 3300yds

Standard Dia. (mm)	0.165	0.205	0.235	0.260	0.285	0.310	0.330
Strength (lb)	4	6	8	10	12	14	16
Line Size (#)	1	1.5	2	2.5	3	3.5	4
Standard Dia. (mm)	0.370	0.405	0.435	0.470	0.520	0.570	
Strength (lb)	20	25	30	35	40	50	
Line Size (#)	3.5	6	7	8	10	12	



●Color : Natural Clear and Jungle Green are available in all lengths, Mizu Blue is available in 330yd and 660yd spools.



SIGLON CARP

SRP
Single Ball Processing

UV-R
UV-Resistant

5175

This is it! Go get that monster carp!

- Super strong, super abrasion resistant, high durability line, specifically designed for wild carp.
- Original SRP processing for good line lay, excellent stretch, and low memory. Great for repeated casting.
- Special copolymer nylon for high strength and low moisture absorption. Stands up to the power and stamina of trophy carp.
- Original UV-R process minimizes weakening and UV damage.

Length : 300m / 1000m ● Color : Matte Green / Matte Red Brown

Standard Dia. (mm)	0.280	0.300	0.330	0.350	0.380	0.410
Strength (kg)	5.5	6.2	7.4	8.2	9.5	11.0

Saltwater Special SYSTEM SHOCK LEADER NYLON

555

Tenacious and rugged,
for landing the big game: SHOCK LEADER.

TRP
Triple Ball Processing

平行巻
Parallel Spooling



Length : 50m ● Color : Natural Clear

Standard Dia. (mm)	0.285	0.330	0.370	0.405	0.435	0.470	0.520	0.570	0.620
Strength (lb)	12	16	20	25	30	35	40	50	60
Line Size (#)	3	4	5	6	7	8	10	12	14

Standard Dia. (mm)	0.660	0.700	0.740	0.810	0.910	1.040
Strength (lb)	70	80	90	100	130	150
Line Size (#)	16	18	20	24	30	40

BLUE HORIZON

SRP
Single Ball Processing

UV-R
UV-Resistant

5975

IGFA class tournament line.

- Highest level performance in both straight and knot strength. Just the right amount of stretch to absorb shock, letting you fight the big ones with confidence.
- Sunline's exclusive surface resin processing absolutely minimizes water absorption. The line remains strong, and dirt and muck just won't stick to the surface.
- Designed with softness for ease of building into any system.
- Exclusive UV-R technology protects the line from sun damage.



Length : 1000m ● Color : Yellow Gold

Standard Dia. (mm)	0.520	0.620	0.810	1.040
Strength (lb)	30	50	80	130
Strength (kg)	15	24	37	60

QUEEN★STAR

SRP
Single Ball Processing

901

Great performance in every field.



Length : 600m

Standard Dia. (mm)	0.128	0.148	0.165	0.205	0.235	0.260	0.285
Strength (lb)	2	3	4	6	8	10	12
Line Size (#)	0.6	0.8	1	1.5	2	2.5	3

Standard Dia. (mm)	0.330	0.370	0.405	0.435	0.470	0.520	0.570
Strength (lb)	16	20	25	30	35	40	50
Line Size (#)	4	5	6	7	8	10	12

Standard Dia. (mm)	0.620	0.660	0.700	0.740	0.780	0.810	0.840
Strength (lb)	60	70	80	90	95	100	110
Line Size (#)	14	16	18	20	22	24	26

Standard Dia. (mm)	0.870	0.910	0.980	1.040	1.170
Strength (lb)	120	130	135	140	170
Line Size (#)	28	30	35	40	50

Length : 500m

Standard Dia. (mm)	1.280	1.380
Strength (lb)	200	210
Line Size (#)	60	70

Length : 400m

Standard Dia. (mm)	1.480	1.560
Strength (lb)	220	250
Line Size (#)	80	90

Length : 300m

Standard Dia. (mm)	1.650	1.810
Strength (lb)	300	350
Line Size (#)	100	120

Length : 200m

Standard Dia. (mm)	2.030
Strength (lb)	400
Line Size (#)	150

● Color : Mist Gray / Clear
※..... Blue / Pink / Yellow



▼ ISO Special FLOATING SPECIAL

5906

Full floating line.



- Sunline's exclusive "Floating Lotus" line geometry achieves a specific gravity of 1.05 for a super-floating line that catches the tide to deliver your rig directly to your target.
- Colors with excellent visibility, developed through repeated testing in actual fishing situations.
- A sea change in floating lines: The ultra-high strength design is a balanced mix of straight and knot strength. The high tenacity is a culmination of Sunline technology.
- Sunline's exclusive UV-R manufacturing process to prevent UV damage, plus special DRP resin

Length : 150m ●Color : Matte Orange

Standard Dia. (mm)	0.240	0.260	0.275	0.290
Strength (lb)	8	10	11	12
Line Size (#)	2	2.5	2.75	3

Length : 200m ●Color : Matte Orange

Standard Dia. (mm)	0.310	0.330	0.370	0.410
Strength (lb)	14	16	20	24
Line Size (#)	3.5	4	5	6

processing to protect the line surface: together, they provide maximum protection against loss of quality, even with long hours of use.

- Lighter sizes (#2 - #2.75) are made with emphasis on strength and sensitivity, while heavier sizes (#3 - #6) are designed for softness and resilience. With Sunline's no-compromise size-specific line design and production, the angler gets a trouble-free, manageable line in any size.

▼ SUPER Z



70

Highly balanced, economy line.

Length : 50m ●Color : Natural Clear

Standard Dia. (mm)	0.090	0.104	0.117	0.128
Strength (lb)	0.8	1	1.5	2
Line Size (#)	0.3	0.4	0.5	0.6

Standard Dia. (mm)	0.148	0.165	0.185	0.205	0.235
Strength (lb)	3	4	5	6	8
Line Size (#)	0.8	1	1.2	1.5	2

Standard Dia. (mm)	0.260	0.285	0.330	0.370	0.405
Strength (lb)	10	12	16	20	25
Line Size (#)	2.5	3	4	5	6



▼ SUPER AYU II



1411

Manageable nylon line!



- A highly balanced mix of strength and resilience for an excellent, all-round nylon line.
- SRP surface processing for good water repellency.
- Low memory. Resists curling.

Length : 50m ●Color : Clear

Standard Dia. (mm)	0.065	0.069	0.074	0.083	0.090	0.097	0.104	0.117	0.128
Line Size (#)	0.15	0.175	0.2	0.25	0.3	0.35	0.4	0.5	0.6

Standard Dia. (mm)	0.148	0.165
Line Size (#)	0.8	1

▼ TROUTIST DARKNESS

537

High molecular weight nylon, customized for trout fishing!



- Made of material with a higher molecular weight than other high-strength nylon lines. High in both tensile and knot strength, with superior durability, manageability, and straightness.
- Newly developed nylon line technology gives you the same strength with smaller line diameter. Improves casting performance.
- "Camouflage Color" blends into any environment, from regulated to natural. Won't spook even the most jaded of fish.

- Low initial stretch gives you accurate feedback of the lightest nibble. Once you set the hook, the incredible tenacity lets you take the lead against violently thrashing monsters.
- 150 meter spool marked at the 75 meter point to let you adjust the amount you load on your reel.

Length : 150m ●Color : Camouflage Dark

Standard Dia. (mm)	0.104	0.117	0.128	0.138	0.148	0.165	0.185	0.219
Strength (lb)	2	2.5	3	3.5	4	5	6	8
Line Size (#)	0.4	0.5	0.6	0.7	0.8	1	1.25	1.75

Standard Dia. (mm)	0.235	0.26	0.285	0.310	0.330
Strength (lb)	10	12	14	16	20
Line Size (#)	2	2.5	3	3.5	4

▼ TROUTIST WILD



528

Easy to see, easy to cast, and strong to boot!



Length : 150m single ●Color : Super Matte Green

Standard Dia. (mm)	0.128	0.148	0.165	0.190	0.205	0.235	0.260	0.285	0.310
Strength (lb)	2.5	3	4	5	6	8	10	12	14
Line Size (#)	0.6	0.8	1	1.25	1.5	2	2.5	3	3.5

Standard Dia. (mm)	0.330	0.370
Strength (lb)	16	20
Line Size (#)	4	5

▶ **SUPER ICE LINE WAKASAGI** ▶ **WAKASAGI_{kun} & CHIKA_{chan} II**

621

611

Vividly colored line for smelt fishing.



Length: 60m ● Color: Pink with Green marking

Standard Dia. (mm)	0.074	0.090	0.104	0.128	0.148
Strength (lb)	0.8	1	1.5	2	3
Line Size (#)	0.2	0.3	0.4	0.6	0.8



Length: 30m ● Color: Pink

Standard Dia. (mm)	0.128	0.148	0.165	0.185	0.205
Strength (lb)	2	3	4	5	6
Line Size (#)	0.6	0.8	1	1.2	1.5

▶ **WAKASAGI 5**


620



Length: 50m ● Color: Green / Red / Yellow / Blue / White

Standard Dia. (mm)	0.128	0.148	0.165	0.185	0.205	0.235	0.285
Strength (lb)	2	3	4	5	6	8	12
Line Size (#)	0.6	0.8	1	1.2	1.5	2	3

Super awesome leader!



Length: 15m x 5

Standard Dia. (mm)	0.165-0.520	0.205-0.570	0.235-0.470	0.235-0.570	0.235-0.620	0.260-0.570	0.285-0.470	0.285-0.570	0.285-0.660
Strength (lb)	4 - 40	6 - 50	8 - 35	8 - 50	8 - 60	10 - 50	12 - 35	12 - 50	12 - 70
Line Size (#)	1 - 10 ^{III}	1.5 - 12 ^{III}	2 - 8 ^{III}	2 - 12 ^{III}	2 - 14	2.5 - 12	3 - 8 ^{III}	3 - 12 ^{III}	3 - 16
Standard Dia. (mm)	0.330-0.570	0.370-0.570							
Strength (lb)	16 - 50	20 - 50							
Line Size (#)	4 - 12 ^{III}	5 - 12 ^{III}							

● Color: Clear Blue - all sizes; Black / Red / Yellow - sizes with^{III}



SIGLON ICE



5100-5



Fluorescent Red

Clear

Length: 50m ● Color: Fluorescent Red / Clear

Standard Dia. (mm)	0.104 - 0.260
Line Size (#)	0.4 - 2.5

SIGLON TIPPET

5040



Clear

Mist Green

Length: 30m ● Color: Clear / Mist Green

Strength (lb)	1 - 15
Line Size (#)	8X - 0X

SIGLON KNOTLESS TAPERED LEADER

5145



Length: 7.5ft / 9ft / 12ft
● Color: Mist Green / Brown

Strength (lb)	2 - 15
Line Size (#)	7X - 0X

▶ **SIGLON F**



5000

Dependable SIGLON resin processing in a fluorescent line!

- Unique resin reinforcement process for a moisture-proof, curl-free, strong, and shock-resistant line.
- The spaces between the nylon molecules are filled with resin.
- A special technique also prevents the fluorescent color from fading.

- UV resistant processing to maintain strength and flexibility over prolonged and repeated use.



Length: 300m / 600m

Standard Dia. (mm)	0.104	0.128	0.148	0.165	0.205	0.235	0.260	0.285	0.310
Strength (kg)	0.7	1	1.5	2	3	4	5	5.5	6
Standard Dia. (mm)	0.330	0.370	0.405	0.435	0.470	0.520	0.570	0.620	0.660
Strength (kg)	7	9	11.5	12	14	18	20	23	27
Standard Dia. (mm)	0.700	0.740							
Strength (kg)	32	37							

● Color: Clear Blue / Fluorescent Pink / Fluorescent Orange / Fluorescent Blue



Fluorescent Orange

FLUOROCARBON LINE

Shooter FC SNIPER

1103

2015 New!!

Back to basics!!



- With world-class standard as its motto, this super fluorocarbon line has been re-forged from square one, starting from a revamping of the raw material itself.
- Each pound test is designed specifically to maximize the features of the line.
- The last word in fluorocarbon line for bass fishing on the world stage.

Length : 110yds. (100m) ●Color : Natural Clear

Standard Dia. (mm)	0.115	0.128	0.140	0.150	0.160	0.170	0.180	0.190	0.200
Strength (lb)	1	1.5	2	2.5	3	3.5	4	4.5	5
Standard Dia. (mm)	0.225	0.245	0.265	0.290	0.310	0.330	0.350	0.365	0.380
Strength (lb)	6	7	8	10	12	14	16	18	20

Length : 66yds. (60m) ●Color : Natural Clear

Standard Dia. (mm)	0.415	0.445
Strength (lb)	25	30

Length : 330yds. (300m) ●Color : Natural Clear

Standard Dia. (mm)	0.160	0.180	0.200	0.225	0.245	0.265	0.290	0.310	0.330
Strength (lb)	3	4	5	6	7	8	10	12	14
Standard Dia. (mm)	0.350	0.365	0.380						
Strength (lb)	16	18	20						



2015 New!!

Shooter


FC SNIPER BMS AZAYAKA

1113

Beauty in presence



- Beautiful on your reel, with a presence that sets you apart; yet non-spooking in the water. Lets you catch the super-short bites that don't reach your rod, detectable only to the human eye watching the line!
- Now it's easy to track your lure trajectory and mend your line after you cast! Try it and you'll really "see" the difference!!



Length : 82.5yds. (75m) ●Color: Natural Clear, Pink, Yellow Green, Orange, & Gray.

Length: 0.2, 0.3, 0.4, 0.5, 0.6, 0.8, 1.0, 1.2, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 6.0, 8.0, 10.0, 12.0, 15.0, 20.0, 25.0, 30.0, 35.0, 40.0, 45.0, 50.0, 60.0, 70.0, 80.0, 90.0, 100.0, 120.0, 150.0, 200.0, 250.0, 300.0, 350.0, 400.0, 450.0, 500.0, 600.0, 700.0, 800.0, 900.0, 1000.0, 1200.0, 1500.0, 2000.0, 2500.0, 3000.0, 3500.0, 4000.0, 4500.0, 5000.0, 6000.0, 7000.0, 8000.0, 9000.0, 10000.0, 12000.0, 15000.0, 20000.0, 25000.0, 30000.0, 35000.0, 40000.0, 45000.0, 50000.0, 60000.0, 70000.0, 80000.0, 90000.0, 100000.0, 120000.0, 150000.0, 200000.0, 250000.0, 300000.0, 350000.0, 400000.0, 450000.0, 500000.0, 600000.0, 700000.0, 800000.0, 900000.0, 1000000.0, 1200000.0, 1500000.0, 2000000.0, 2500000.0, 3000000.0, 3500000.0, 4000000.0, 4500000.0, 5000000.0, 6000000.0, 7000000.0, 8000000.0, 9000000.0, 10000000.0, 12000000.0, 15000000.0, 20000000.0, 25000000.0, 30000000.0, 35000000.0, 40000000.0, 45000000.0, 50000000.0, 60000000.0, 70000000.0, 80000000.0, 90000000.0, 100000000.0, 120000000.0, 150000000.0, 200000000.0, 250000000.0, 300000000.0, 350000000.0, 400000000.0, 450000000.0, 500000000.0, 600000000.0, 700000000.0, 800000000.0, 900000000.0, 1000000000.0, 1200000000.0, 1500000000.0, 2000000000.0, 2500000000.0, 3000000000.0, 3500000000.0, 4000000000.0, 4500000000.0, 5000000000.0, 6000000000.0, 7000000000.0, 8000000000.0, 9000000000.0, 10000000000.0, 12000000000.0, 15000000000.0, 20000000000.0, 25000000000.0, 30000000000.0, 35000000000.0, 40000000000.0, 45000000000.0, 50000000000.0, 60000000000.0, 70000000000.0, 80000000000.0, 90000000000.0, 100000000000.0, 120000000000.0, 150000000000.0, 200000000000.0, 250000000000.0, 300000000000.0, 350000000000.0, 400000000000.0, 450000000000.0, 500000000000.0, 600000000000.0, 700000000000.0, 800000000000.0, 900000000000.0, 1000000000000.0, 1200000000000.0, 1500000000000.0, 2000000000000.0, 2500000000000.0, 3000000000000.0, 3500000000000.0, 4000000000000.0, 4500000000000.0, 5000000000000.0, 6000000000000.0, 7000000000000.0, 8000000000000.0, 9000000000000.0, 10000000000000.0, 12000000000000.0, 15000000000000.0, 20000000000000.0, 25000000000000.0, 30000000000000.0, 35000000000000.0, 40000000000000.0, 45000000000000.0, 50000000000000.0, 60000000000000.0, 70000000000000.0, 80000000000000.0, 90000000000000.0, 100000000000000.0, 120000000000000.0, 150000000000000.0, 200000000000000.0, 250000000000000.0, 300000000000000.0, 350000000000000.0, 400000000000000.0, 450000000000000.0, 500000000000000.0, 600000000000000.0, 700000000000000.0, 800000000000000.0, 900000000000000.0, 1000000000000000.0, 1200000000000000.0, 1500000000000000.0, 2000000000000000.0, 2500000000000000.0, 3000000000000000.0, 3500000000000000.0, 4000000000000000.0, 4500000000000000.0, 5000000000000000.0, 6000000000000000.0, 7000000000000000.0, 8000000000000000.0, 9000000000000000.0, 10000000000000000.0, 12000000000000000.0, 15000000000000000.0, 20000000000000000.0, 25000000000000000.0, 30000000000000000.0, 35000000000000000.0, 40000000000000000.0, 45000000000000000.0, 50000000000000000.0, 60000000000000000.0, 70000000000000000.0, 80000000000000000.0, 90000000000000000.0, 100000000000000000.0, 120000000000000000.0, 150000000000000000.0, 200000000000000000.0, 250000000000000000.0, 300000000000000000.0, 350000000000000000.0, 400000000000000000.0, 450000000000000000.0, 500000000000000000.0, 600000000000000000.0, 700000000000000000.0, 800000000000000000.0, 900000000000000000.0, 1000000000000000000.0, 1200000000000000000.0, 1500000000000000000.0, 2000000000000000000.0, 2500000000000000000.0, 3000000000000000000.0, 3500000000000000000.0, 4000000000000000000.0, 4500000000000000000.0, 5000000000000000000.0, 6000000000000000000.0, 7000000000000000000.0, 8000000000000000000.0, 9000000000000000000.0, 10000000000000000000.0, 12000000000000000000.0, 15000000000000000000.0, 20000000000000000000.0, 25000000000000000000.0, 30000000000000000000.0, 35000000000000000000.0, 40000000000000000000.0, 45000000000000000000.0, 50000000000000000000.0, 60000000000000000000.0, 70000000000000000000.0, 80000000000000000000.0, 90000000000000000000.0, 100000000000000000000.0, 120000000000000000000.0, 150000000000000000000.0, 200000000000000000000.0, 250000000000000000000.0, 300000000000000000000.0, 350000000000000000000.0, 400000000000000000000.0, 450000000000000000000.0, 500000000000000000000.0, 600000000000000000000.0, 700000000000000000000.0, 800000000000000000000.0, 900000000000000000000.0, 1000000000000000000000.0, 1200000000000000000000.0, 1500000000000000000000.0, 2000000000000000000000.0, 2500000000000000000000.0, 3000000000000000000000.0, 3500000000000000000000.0, 4000000000000000000000.0, 4500000000000000000000.0, 5000000000000000000000.0, 6000000000000000000000.0, 7000000000000000000000.0, 8000000000000000000000.0, 9000000000000000000000.0, 10000000000000000000000.0, 12000000000000000000000.0, 15000000000000000000000.0, 20000000000000000000000.0, 25000000000000000000000.0, 30000000000000000000000.0, 35000000000000000000000.0, 40000000000000000000000.0, 45000000000000000000000.0, 50000000000000000000000.0, 60000000000000000000000.0, 70000000000000000000000.0, 80000000000000000000000.0, 90000000000000000000000.0, 100000000000000000000000.0, 120000000000000000000000.0, 150000000000000000000000.0, 200000000000000000000000.0, 250000000000000000000000.0, 300000000000000000000000.0, 350000000000000000000000.0, 400000000000000000000000.0, 450000000000000000000000.0, 500000000000000000000000.0, 600000000000000000000000.0, 700000000000000000000000.0, 800000000000000000000000.0, 900000000000000000000000.0, 1000000000000000000000000.0, 1200000000000000000000000.0, 1500000000000000000000000.0, 2000000000000000000000000.0, 2500000000000000000000000.0, 3000000000000000000000000.0, 3500000000000000000000000.0, 4000000000000000000000000.0, 4500000000000000000000000.0, 5000000000000000000000000.0, 6000000000000000000000000.0, 7000000000000000000000000.0, 8000000000000000000000000.0, 9000000000000000000000000.0, 10000000000000000000000000.0, 12000000000000000000000000.0, 15000000000000000000000000.0, 20000000000000000000000000.0, 25000000000000000000000000.0, 30000000000000000000000000.0, 35000000000000000000000000.0, 40000000000000000000000000.0, 45000000000000000000000000.0, 50000000000000000000000000.0, 60000000000000000000000000.0, 70000000000000000000000000.0, 80000000000000000000000000.0, 90000000000000000000000000.0, 100000000000000000000000000.0, 120000000000000000000000000.0, 150000000000000000000000000.0, 200000000000000000000000000.0, 250000000000000000000000000.0, 300000000000000000000000000.0, 350000000000000000000000000.0, 400000000000000000000000000.0, 450000000000000000000000000.0, 500000000000000000000000000.0, 600000000000000000000000000.0, 700000000000000000000000000.0, 800000000000000000000000000.0, 900000000000000000000000000.0, 1000000000000000000000000000.0, 1200000000000000000000000000.0, 1500000000000000000000000000.0, 2000000000000000000000000000.0, 2500000000000000000000000000.0, 3000000000000000000000000000.0, 3500000000000000000000000000.0, 4000000000000000000000000000.0, 4500000000000000000000000000.0, 5000000000000000000000000000.0, 6000000000000000000000000000.0, 7000000000000000000000000000.0, 8000000000000000000000000000.0, 9000000000000000000000000000.0, 10000000000000000000000000000.0, 12000000000000000000000000000.0, 15000000000000000000000000000.0, 20000000000000000000000000000.0, 25000000000000000000000000000.0, 30000000000000000000000000000.0, 35000000000000000000000000000.0, 40000000000000000000000000000.0, 45000000000000000000000000000.0, 50000000000000000000000000000.0, 60000000000000000000000000000.0, 70000000000000000000000000000.0, 80000000000000000000000000000.0, 90000000000000000000000000000.0, 100000000000000000000000000000.0, 120000000000000000000000000000.0, 150000000000000000000000000000.0, 200000000000000000000000000000.0, 250000000000000000000000000000.0, 300000000000000000000000000000.0, 350000000000000000000000000000.0, 400000000000000000000000000000.0, 450000000000000000000000000000.0, 500000000000000000000000000000.0, 600000000000000000000000000000.0, 700000000000000000000000000000.0, 800000000000000000000000000000.0, 900000000000000000000000000000.0, 1000000000000000000000000000000.0, 1200000000000000000000000000000.0, 1500000000000000000000000000000.0, 2000000000000000000000000000000.0, 2500000000000000000000000000000.0, 3000000000000000000000000000000.0, 3500000000000000000000000000000.0, 4000000000000000000000000000000.0, 4500000000000000000000000000000.0, 5000000000000000000000000000000.0, 6000000000000000000000000000000.0, 7000000000000000000000000000000.0, 8000000000000000000000000000000.0, 9000000000000000000000000000000.0, 10000000000000000000000000000000.0, 12000000000000000000000000000000.0, 15000000000000000000000000000000.0, 20000000000000000000000000000000.0, 25000000000000000000000000000000.0, 30000000000000000000000000000000.0, 35000000000000000000000000000000.0, 40000000000000000000000000000000.0, 45000000000000000000000000000000.0, 50000000000000000000000000000000.0, 60000000000000000000000000000000.0, 70000000000000000000000000000000.0, 80000000000000000000000000000000.0, 90000000000000000000000000000000.0, 100000000000000000000000000000000.0, 120000000000000000000000000000000.0, 150000000000000000000000000000000.0, 200000000000000000000000000000000.0, 250000000000000000000000000000000.0, 300000000000000000000000000000000.0, 350000000000000000000000000000000.0, 400000000000000000000000000000000.0, 450000000000000000000000000000000.0, 500000000000000000000000000000000.0, 600000000000000000000000000000000.0, 700000000000000000000000000000000.0, 800000000000000000000000000000000.0, 900000000000000000000000000000000.0, 1000000000000000000000000000000000.0, 1200000000000000000000000000000000.0, 1500000000000000000000000000000000.0, 2000000000000000000000000000000000.0, 2500000000000000000000000000000000.0, 3000000000000000000000000000000000.0, 3500000000000000000000000000000000.0, 4000000000000000000000000000000000.0, 4500000000000000000000000000000000.0, 5000000000000000000000000000000000.0, 6000000000000000000000000000000000.0, 7000000000000000000000000000000000.0, 8000000000000000000000000000000000.0, 9000000000000000000000000000000000.0, 10000000000000000000000000000000000.0, 12000000000000000000000000000000000.0, 15000000000000000000000000000000000.0, 20000000000000000000000000000000000.0, 25000000000000000000000000000000000.0, 30000000000000000000000000000000000.0, 35000000000000000000000000000000000.0, 40000000000000000000000000000000000.0, 45000000000000000000000000000000000.0, 50000000000000000000000000000000000.0, 60000000000000000000000000000000000.0, 70000000000000000000000000000000000.0, 80000000000000000000000000000000000.0, 90000000000000000000000000000000000.0, 100000000000000000000000000000000000.0, 120000000000000000000000000000000000.0, 150000000000000000000000000000000000.0, 200000000000000000000000000000000000.0, 250000000000000000000000000000000000.0, 300000000000000000000000000000000000.0, 350000000000000000000000000000000000.0, 400000000000000000000000000000000000.0, 450000000000000000000000000000000000.0, 500000000000000000000000000000000000.0, 600000000000000000000000000000000000.0, 700000000000000000000000000000000000.0, 800000000000000000000000000000000000.0, 900000000000000000000000000000000000.0, 1000000000000000000000000000000000000.0, 1200000000000000000000000000000000000.0, 1500000000000000000000000000000000000.0, 2000000000000000000000000000000000000.0, 2500000000000000000000000000000000000.0, 3000000000000000000000000000000000000.0, 3500000000000000000000000000000000000.0, 4000000000000000000000000000000000000.0, 4500000000000000000000000000000000000.0, 5000000000000000000000000000000000000.0, 6000000000000000000000000000000000000.0, 7000000000000000000000000000000000000.0, 8000000000000000000000000000000000000.0, 9000000000000000000000000000000000000.0, 10000000000000000000000000000000000000.0, 12000000000000000000000000000000000000.0, 15000000000000000000000000000000000000.0, 20000000000000000000000000000000000000.0, 25000000000000000000000000000000000000.0, 30000000000000000000000000000000000000.0, 35000000000000000000000000000000000000.0, 40000000000000000000000000000000000000.0, 45000000000000000000000000000000000000.0, 50000000000000000000000000000000000000.0, 600000000000000000000

Shooter FC SNIPER INVISIBLE

1116

Zero presence!



- Minimizes pressure on line-shy fish!
- Designed with colors that exist in natural structures (e.g. weeds, rocks, trees).
- By erasing the presence of the line, it's now easy to approach the wary big bass.



Length : 82.5yds. (75m) ●Color: Natural Clear, Moss Green, Gray, Green, & Reddish Brown.

Length: 82.30yd. (3m) Color: Natural Clear, Moss Green, Gray, Green, & Reddish Brown.									
Standard Dia. (mm)	0.140	0.150	0.160	0.170	0.180	0.190	0.200	0.225	0.245
Strength (lb)	2	2.5	3	3.5	4	4.5	5	6	7
Standard Dia. (mm)	0.265	0.290	0.310	0.330	0.350	0.380			
Strength (lb)	8	10	12	14	16	20			

2015 New!!



▼Tornado **V HARD** TRP Triple Resin Processing 平行巻 Parallel Spooling

1031

The strongest Tornado in history!
 An incredible 30% improvement in strength!!



- High uniformity minimizes glare in the water, allowing you to sneak up on the most wary of fish. Excellent straightness lets you control your line and tie knots with ease.
- Unbelievably strong, straight or knotted: Both 30% stronger.
- Our exclusive Hard Protect Resin Processing for a supple, yet abrasion resistant, super-hard finish.
- Retains its transparency for long periods underwater, giving you a longer time to stalk your target.

Length : 50m ●Color : Natural Clear

Standard Dia. (mm)	0.128	0.148	0.165	0.190	0.205	0.219	0.235	0.260	0.285
Strength (lb)	2	3	4	5	6	7	8	10	12
Line Size (#)	0.6	0.8	1	1.25	1.5	1.75	2	2.5	3
Standard Dia. (mm)	0.310	0.330	0.370	0.405	0.435	0.470	0.520	0.570	
Strength (lb)	14	16	20	25	30	35	40	50	
Line Size (#)	3.5	4	5	6	7	8	10	12	

Length : 100m ●Color : Natural Clear

Standard Dia. (mm)	0.235	0.260	0.285	0.310	0.330	0.370	0.405	0.435	0.470
Strength (lb)	8	10	12	14	16	20	25	30	35
Line Size (#)	2	2.5	3	3.5	4	5	6	7	8

▼SIGLON FC TRP Triple Resin Processing

5134

Sunline's long-seller fluorocarbon line!



Length : 30m ●Color : Clear

Standard Dia. (mm)	0.100	0.128	0.140	0.160	0.180	0.200	0.225	0.245	0.265
Strength (lb)	1.5	2.4	3	4	5	6	8	9	10
Strength (kg)	0.7	1.1	1.4	1.8	2.2	2.8	3.4	4.1	4.7
Line Size (#)	0.3	0.5	0.6	0.8	1	1.25	1.5	1.75	2
Standard Dia. (mm)	0.290	0.310	0.350						
Strength (lb)	12	14	18						
Strength (kg)	5.4	6.1	8						
Line Size (#)	2.5	3	4						

Length : 50m ●Color : Clear

Standard Dia. (mm)	0.140	0.160	0.180	0.200	0.225	0.245	0.265	0.290	0.310
Strength (lb)	3	4	5	6	8	9	10	12	14
Strength (kg)	1.4	1.8	2.2	2.8	3.4	4.1	4.7	5.4	6.1
Line Size (#)	0.6	0.8	1	1.25	1.5	1.75	2	2.5	3
Standard Dia. (mm)	0.330	0.350	0.380	0.415	0.445	0.490	0.550	0.600	0.620
Strength (lb)	16	18	20	24	26	32	38	44	50
Strength (kg)	7.1	8	9.1	10.9	12	14.4	17	19.9	22.4
Line Size (#)	3.5	4	5	6	7	8	10	12	14
Standard Dia. (mm)	0.660	0.700	0.740	0.780	0.810	0.840			
Strength (lb)	54	61	67	70	73	77			
Strength (kg)	24.5	27.5	30.5	32	33.5	35			
Line Size (#)	16	18	20	22	24	26			

▼Tornado **BASIC FUNE HARRIS**

1005

Reliable strength & suppleness.
 Reasonably priced, high performance fluorocarbon leader.



Length : 100m ●Color : Clear

Standard Dia. (mm)	0.205	0.219	0.235	0.260	0.285	0.310	0.330	0.370	0.405
Line Size (#)	1.5	1.75	2	2.5	3	3.5	4	5	6
Standard Dia. (mm)	0.435	0.470	0.520	0.570	0.620	0.660	0.700	0.740	
Line Size (#)	7	8	10	12	14	16	18	20	

Length : 50m ●Color : Clear

Standard Dia. (mm)	0.780	0.810	0.840	0.870	0.910
Line Size (#)	22	24	26	28	30

▼BASIC FC SRP Single Resin Processing

1105

Basic fluorocarbon line for every conceivable kind of fishing.



- 75-meter marking for easy spooling onto your reel, plus an indicator sticker to show you how much line you have left.
- Easy to use - simply pull the line out from the outlet on the side of the package. No need to remove the case to do your spooling.
- A reasonably priced fluorocarbon that delivers a full array of good, basic performance.

Length : 300m ●Color : Natural Clear

Standard Dia. (mm)	0.128	0.148	0.165	0.190	0.205	0.235	0.260	0.285	0.310
Strength (lb)	2	3	4	5	6	8	10	12	14
Line Size (#)	0.6	0.8	1	1.25	1.5	2	2.5	3	3.5

Length : 225m ●Color : Natural Clear

Standard Dia. (mm)	0.330	0.370
Strength (lb)	16	20
Line Size (#)	4	5

▼ Saltwater Special **FC ROCK**

1060

Outstanding strength and durability!
Fluorocarbon line for Rock Fish.



Length : 100m ●Color : Clear

Standard Dia. (mm)	0.090	0.104	0.128	0.148	0.165	0.190	0.205	0.235	0.260
Strength (lb)	0.8	1	2	3	4	5	6	8	10
Line Size (#)	0.3	0.4	0.6	0.8	1	1.25	1.5	2	2.5
Standard Dia. (mm)	0.285	0.310	0.330	0.370					
Strength (lb)	12	14	16	20					
Line Size (#)	3	3.5	4	5					

Length : 70m ●Color : Clear

Standard Dia. (mm)	0.405	0.435
Strength (lb)	25	30
Line Size (#)	6	7

Length : 50m ●Color : Clear

Standard Dia. (mm)	0.520	0.570
Strength (lb)	40	50
Line Size (#)	10	12

▼ Saltwater Special **SYSTEM LEADER FC100**

1081-5192

Supple fluorocarbon shock leader.



- The evolution of a new concept: 100% fluorocarbon leader. Non-stress spooling to avoid crushing or flattening of the line. Comes in 100m spools, ideal for offshore trips.
- Balanced design is line weight specific: emphasis on suppleness and minimum interference on lure movement for light game lines,

and a focus on hardness and the ruggedness to withstand abrasion and strong, sharp teeth to the limit for big game lines.

- TRP (Triple Resin Processing) for outstanding abrasion resistance against rocks, debris, weeds, and the fish's body.

Length : 100m ●Color : Natural Clear

Standard Dia. (mm)	0.330	0.405	0.470	0.520	0.570	0.620	0.660	0.700	0.740
Strength (lb)	16	20	30	35	40	45	50	55	60
Line Size (#)	4	6	8	10	12	14	16	18	20
Standard Dia. (mm)	0.780	0.810	0.840	0.870	0.910				
Strength (lb)	65	70	80	90	100				
Line Size (#)	22	24	26	28	30				

Length : 30m ●Color : Natural Clear

Standard Dia. (mm)	0.330	0.405	0.520	0.620	0.660	0.700	0.740	0.780	0.810
Strength (lb)	16	20	35	45	50	55	60	65	70
Line Size (#)	4	6	10	14	16	18	20	22	24
Standard Dia. (mm)	0.840	0.870	0.910						
Strength (lb)	80	90	100						
Line Size (#)	26	28	30						

Tornado Matsuda Tournament Special **BLACK STREAM**

1040

Unbelievable strength and tenacity!



- Non-stress spooling allows the line to maintain its quality at a high level, because no excessive stress is placed on the line.
- Tournament-sized, thin connecting spools fit snugly in your pocket, letting you change sizes quickly and smoothly.
- Generous, 70m length is handy for competitive situations with frequent changing of rigs.

Length : 70m ●Color : Blacky

Standard Dia. (mm)	0.148	0.165	0.190	0.205	0.219	0.235	0.248	0.260	0.274
Line Size (#)	0.8	1	1.25	1.5	1.75	2	2.25	2.5	2.75
Standard Dia. (mm)	0.285								
Line Size (#)	3								

Length : 50m ●Color : Blacky

Standard Dia. (mm)	0.310	0.330	0.370
Line Size (#)	3.5	4	5

Tornado Matsuda Tournament Special **POWER STREAM**

1041

High sensitivity, high abrasion resistance fluorocarbon leader.



- Non-stress spooling allows the line to maintain its quality at a high level, because no excessive stress is placed on the line.

- Tournament-sized, thin connecting spools fit snugly in your pocket, letting you change sizes quickly and smoothly.

- Generous, 70m length is handy for competitive situations with frequent changing of rigs.

Length : 70m ●Color : Natural Clear

Standard Dia. (mm)	0.148	0.165	0.190	0.205	0.219	0.235	0.248	0.260	0.274
Line Size (#)	0.8	1	1.25	1.5	1.75	2	2.25	2.5	2.75
Standard Dia. (mm)	0.285								
Line Size (#)	3								

▼Tornado V-PLUS



5916

Fluorocarbon leader with high sensitivity and outstanding abrasion resistance.

2015 New!!



- Our newly developed high tenacity fluorocarbon fiber and exclusive TRP surface processing give this line high knot strength, easy tying, and knot durability.
- "Insta-stop" Spool
Thin, compact spool for functionality and ease of storage. Spools out smoothly and let you stop the line surely, quickly, and easily with the "Insta-stop" mechanism.
Comes with a handy connected spool stopper.

Length : 50m ●Color : Clear

Standard Dia. (mm)	0.165	0.190	0.205	0.219	0.235	0.260	0.285	0.310	0.330
Strength (lb)	4	5	6	7	8	10	12	14	16
Line Size (#)	1	1.25	1.5	1.75	2	2.5	3	3.5	4

Standard Dia. (mm)	0.370
Strength (lb)	20
Line Size (#)	5

▼Tornado SV-1

1032

Invisible to fish! The power of pink!



- Pink Leader is Sunline's patented technology, proven by field tests and backed by rigorous scientific research on color wavelengths that are difficult to see for fish.
- Non Stress Spooling
Non Stress Spooling prevents curling and flattening, so your leader is always at its very best when you use it.
- "Insta-stop"
Thin, compact spool for functionality and ease of storage. Spools out smoothly and lets you stop the line surely, quickly, and easily with the "Insta-stop" mechanism. Comes with a handy connected spool stopper.

Length : 50m ●Color : Magical Pink

Standard Dia. (mm)	0.148	0.165	0.190	0.205	0.219	0.235	0.260	0.285	0.330
Strength (lb)	3	4	5	6	7	8	10	12	16
Line Size (#)	0.8	1	1.25	1.5	1.75	2	2.5	3	4

Standard Dia. (mm)	0.370
Strength (lb)	20
Line Size (#)	5

▼FC ROCK LEADER BREEM SPECIAL



5275

Designed specifically for bream fishing.

2015 New!!



- Excellent smoothness lets you control your line and knots with ease - makes all the difference in real-life fishing situations.
- High uniformity minimises glare in the water, and improved transparency for long periods underwater gives you the ultimate stealth and finesse presentation.
- Slim and connectable spool design fits nicely into your pocket and allows for fast selection of different line sizes.
- Manufactured with Triple Resin Processing for improved knot strength and abrasion resistance.
- 100% Fluorocarbon.

Length : 50m ●Color : Natural Clear

Standard Dia. (mm)	0.128	0.148	0.165	0.190	0.205	0.219	0.235	0.260	0.285
Strength (lb)	2	3	4	5	6	7	8	10	12
Line Size (#)	0.6	0.8	1	1.25	1.5	1.75	2	2.5	3


▼SUPER ICE LINE WAKASAGI FC

1131

High visibility! High specific gravity!



- Fluorocarbon line resists degradation, maintaining its original quality for reliable performance even in the coldest, harshest weather.
- High specific gravity for a good, sinking line that's not affected by wind or water currents, giving solid feedback to your rod tip.



Length : 60m ●Color : Orange with Brown markings

Standard Dia. (mm)	0.074	0.083	0.090	0.104	0.128	0.148
Line Size (#)	0.2	0.25	0.3	0.4	0.6	0.8

Sunline's original super high strength, super high sensitivity braided fishing line!

2015 New!!

SUPER PE



5166

- The new, redesigned Super PE, now incorporating High Performance PE with outstanding characteristics.
- Manufactured with new technology to achieve high straight and knot strength, plus high-level abrasion resistance. Also resists crushing and flattening, maintaining its circular profile to minimize friction in the water.
- The smooth surface configuration, made possible with the new resin coating process, gives the line excellent long casting execution and control.
- Low-stretch design for high sensitivity. The lightest bite is fed back directly to the angler for unmistakable performance.



Light Blue



Light Green



Dark Green

Length : 150m ●Color : Light Blue / Light Green / Dark Green

Strength (lb)	4	6	8	10	15	20	25	30
Line Size (#)	0.4	0.6	0.8	1	1.5	2	2.5	3

Length : 300m ●Color : Light Blue / Light Green / Dark Green

Strength (lb)	15	20	25	30	40	50	60	80
Line Size (#)	1.5	2	2.5	3	4	5	6	8

Length : 1800m ●Color : Light Green

Strength (lb)	4	6	8	10	15	20	25	30	40
Line Size (#)	0.4	0.6	0.8	1	1.5	2	2.5	3	4
Strength (lb)	50	60	80						
Line Size (#)	5	6	8						

▶ SUPER PE 8

HP-PE
High Performance PE

5172

2015 New!!

- Eight strand braid with circular cross section prevents flatterring of the line when wound on reel.
- High strength polyethylene braid for complete confidence with the big catch.
- Super sensitive, super low stretch design to capture the most delicate bites.
- Slick, smooth line surface for low guide friction and excellent castability.
- Knots are easy to make and keep in place.
- Bright orange color for outstanding visibility.

Length : 150m ●Color : Orange

Strength (lb)	6	8	10	12	15	20	25	30
Strength (kg)	3	4	5	6	7.5	10	12.5	15

Length : 300m ●Color : Orange

Strength (lb)	40	50	60
Strength (kg)	20	25	30



▼ SUPER BRAID 5


HQ-PE
High Quality PE

1379

PE braid with vivid, 5-color rotation! Quality on a brand new level while keeping the price to a minimum.

2015 New!!

- High quality polyethylene four-strand braid with just the right amount of stiffness and resilience.
- Super high sensitivity and strength to grab the bite and fight with power.
- Exclusive, specialized dyeing technology taken a step further for even more vivid color presentation and significantly improved fade resistance.
- Color line coded (every 10m of blue-pink-orange-green-red rotation) for exact line out measurements – applicable to a wide range of fishing situations including offshore bait casting and lure fishing (shore and offshore).

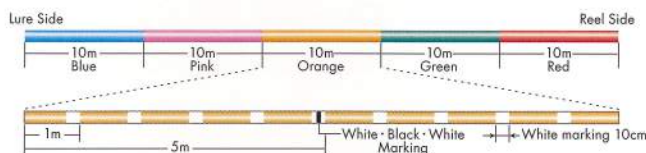

Length : 150m single spool / 200m single spool ●Color : Blue / Pink / Orange / Green / Red

Strength (kg)	4.0	5.1	6.1	7.1	8.8	11.5	14.0	17.0
Line Size (#)	0.6	0.8	1	1.2	1.5	2	2.5	3

Length : 100m*12 connected spool ●Color : Blue / Pink / Orange / Green / Red

Strength (kg)	5.1	6.1	7.1	8.8	11.5	14.0	17.0	22.0	27.5
Line Size (#)	0.8	1	1.2	1.5	2	2.5	3	4	5

Strength (kg)	33.0	40.0	50.0	60.0	75.0
Line Size (#)	6	8	10	12	15

Length : 100m*18 connected spool ●Color : Blue / Pink / Orange / Green / Red

Strength (kg)	40.0	50.0	60.0
Line Size (#)	8	10	12

Length : 50m*12 connected spool ●Color : Blue / Pink / Orange / Green / Red

Strength (kg)	80.0	100.0
Line Size (#)	20	30

Saltwater Special **PE-EGI ULT** ULT-PE Ultimate PE

1377

Instant feedback like no other! ULT-PE!!

- The ultimate in high performance, developed for thinness and power. Gives you the sharpness and toughness you need for dynamic casting and aggressive pumping.
- Made with ULT-PE for superior strength, stiffness, sensitivity, and abrasion resistance. Super-sensitive line design to give you precise, instant feedback of the tiniest action. Moderate stiffness and special coating for outstanding manageability and unbelievably high durability. Now you can go into those heavy cover areas and rocky sections you've never dared to try before.
- Four vivid base colors 15 meters each, marked every 2.5 meters for easy checking of casting, drift, and hit point distances.
- Newly added sizes (#0.3 and #0.5) for more variation in your eging style. Now you can use more aggressive, challenging techniques.



Length : 120m

●Colors : Color marking system consisting of white, pink, yellow, and light green

Strength (kg)	4.5	6.0	7.7
Line Size (#)	0.6	0.8	1

Length : 180m


●Colors : Color marking system consisting of white, pink, yellow, and light green

Strength (kg)	2.5	3.3	3.9	4.5	6.0	7.7
Line Size (#)	0.3	0.4	0.5	0.6	0.8	1

Length : 240m

●Colors : Color marking system consisting of white, pink, yellow, and light green

Strength (kg)	2.5	3.3	3.9	4.5
Line Size (#)	0.3	0.4	0.5	0.6

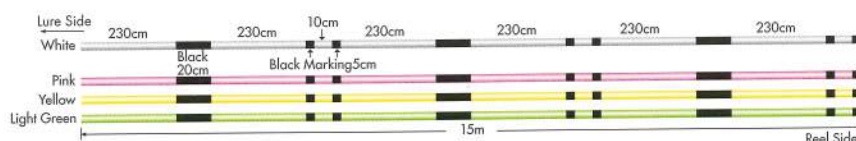

Length : 150m ●Color : Pearl Blue

Strength (lb)	10	12	16	20	25	30	40	50
Line Size (#)	0.6	0.8	1	1.2	1.5	2	2.5	3

Length : 200m ●Color : Pearl Blue

Strength (lb)	30	40	50	60
Line Size (#)	2	2.5	3	4

Length : 300m ●Color : Pearl Blue

Strength (lb)	60	70	80
Line Size (#)	4	5	6

Saltwater Special **CAST AWAY PE**

1366

**I.G.F.A. rated high grade
PE 8-carrier PE casting line!**

HG-PE TYPE II
+ POLYESTER

- Highly versatile PE line for a wide range of lure casting situations on or off shore: Sea bass, squid, baby giant trevally, young yellowtail, hairtail, dorado, amberjack, tuna, etc.
- Special eight-carrier braid made of a combination of high grade PE and high specific gravity ester monofilament.
- Special hybrid manufacturing technology balances just the right amount of stiffness and strength, maximizing casting distance and performance while reducing guide tangling and other problems.
- The highly balanced design has also taken durability and abrasion resistance to the next level.
- Designed to have moderate specific gravity so that the line is less prone to the effects of wind and tide. Responds with precision even when going after wary fish hiding in the deep water.
- Low stretch/high sensitivity line conveys every action of your rod directly to your lure.
- Resin coating with emphasis on slickness.
- Not just for the day game; the pearl blue color is highly visible for night fishing too.



Dark Green



Fluor. Yellow

SUNLINE **MOMENTUM 4x4**

5257

**Your wish is its command! Unbelievably versatile,
new concept 4 X 4 structure braided line!**

HG-PE TYPE II
+ POLYESTER

- High grade polyethylene and high specific gravity ester monofilaments in a 4 x 4 structure for an amazing specific gravity of 1.05, making it less susceptible to the effect of wind and waves and better able to blend with the tide.
- Slick, smooth line surface for minimal guide friction and longer casting distance compared to 100% polyethylene.
- Just the right amount of stiffness and firmness for trouble-free handling on the guides.
- Knots are easy to make and keep in place.
- The line is easy to cut cleanly, making it easy to pass through the eye of hook.
- Excellent abrasion resistance.

Length : 150m ●Color : Dark Green / Fluor. Yellow

Standard Dia. (mm)	0.156	0.175	0.192	0.208	0.260	0.287	0.312
Strength (lb)	10	12	16	20	30	40	50
Line Size (#)	0.6	0.8	1	1.2	2	2.5	3

Length : 200m ●Color : Dark Green / Fluor. Yellow

Standard Dia. (mm)	0.260	0.287	0.312
Strength (lb)	30	40	50
Line Size (#)	2	2.5	3

▶ TROUTIST AREA PE HG-PE

1260

High visibility & abrasion resistance



Length : 75m ● Color : Flu.Yellow

Strength (lb)	5	6	8
Line Size (#)	0.2	0.3	0.4

▶ SNAKEHEAD BRAID SUPER PE

1378

Ultra high strength PE! Heavy cover buster



Length : 80m ● Color : Stealth Black

Strength (lb)	80	100
Line Size (#)	8	10

▶ Saltwater Special CASTAWAY MONSTER BATTLE PE

1374

High strength, high performance braided line for casting!

HG-PE

- High strength, high grade braided line for use when casting for tuna or yellowtail.
- Eight-strand braid plus special surface resin processing for reduced guide friction and significant improvement in manageability.
- A 2-meter black marking every 50 meters gives you pinpoint feedback of length and distance.

Length : 300m ● Color : Sky Blue

Strength (lb)	50	60	80	90	100	130
Line Size (#)	3	4	5	6	8	10

Length : 200m ● Color : Sky Blue

Strength (lb)	150
Line Size (#)	12



▶ Saltwater Special PE JIGGER 8 HG

1365

The strongest eight-carrier braid:
EMCSIII for unbelievably easier jiggling!

HG-PE

- Now 20% stronger, ultra high strength line with eight-carrier braiding of high grade PE. Lets you respond even more aggressively – now you can call all the shots when you fight the fish.
- Special finish produces a smooth surface, reducing screeching of the line when jerking.
- Minimal guide friction for fast fall rate. Unique tight braid design makes the line virtually impervious to surface damage.
- The further evolution of ultra high sensitivity and simple, high performance color pattern EMCSII make for easy feedback of water depth and bite depth.
- Gives you instant and precise detection of the most delicate hits on your falling lure or bait.

Length : 100m connected spool ● Color Pattern : Green / Purple / Red / Blue / Orange


Strength (lb)	35	40	50	60	80	90	100	130
Line Size (#)	2	2.5	3	4	5	6	8	10

Length : 200m single spool ● Color Pattern : Green / Purple / Red / Blue / Orange


Strength (lb)	35	40	50
Line Size (#)	2	2.5	3

Length : 300m single spool ● Color Pattern : Green / Purple / Red / Blue / Orange

Strength (lb)	35	40	50	60
Line Size (#)	2	2.5	3	4



● PE JIGGER 8HG & PE JIGGER LIGHT SPECIAL EMCS (Easy Measuring Color System) III (pat. pend.) color pattern

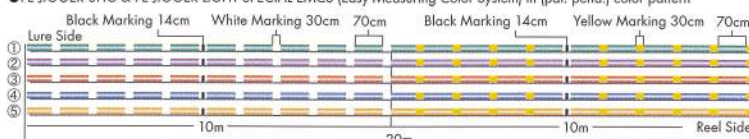


FG Knot


Joining your braid and leader




Albight Knot

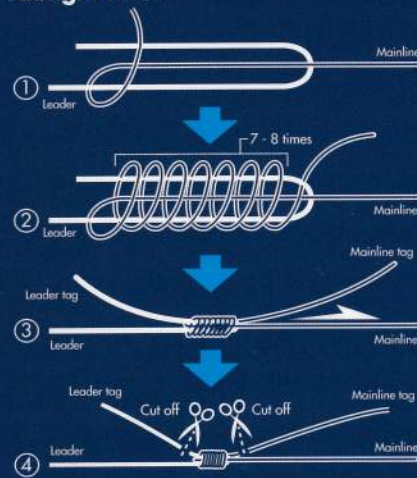


Blood Knot

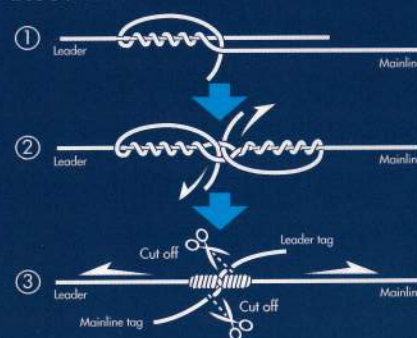

Uni Knot

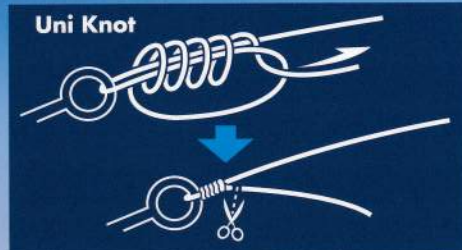

Double Crinch Knot

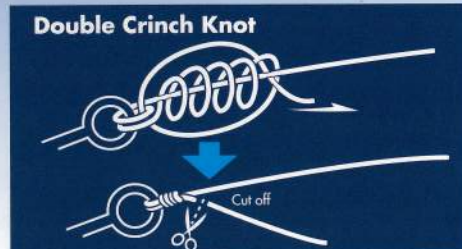

The Strength To Guarantee Your Confidence
SUNLINE
<http://www.sunline.co.jp>

SUNLINE CO., LTD.

1600-21 Kugamachi, Iwakuni, Yamaguchi 742-0315 Japan
 Tel : +81 (0)827-82-7477 Fax : +81 (0)827-81-0034 E-Mail Address : overseas55@sunline.co.jp